


# Product Information

---

---

## DT17S 2-Wire Indoor Monitor

---

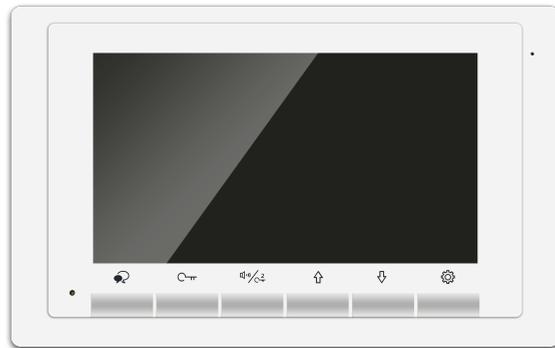


---

### DESCRIPTION

2-wire system 7 inch digital color TFT monitor with dummy mechanical button.


### DIMENSION

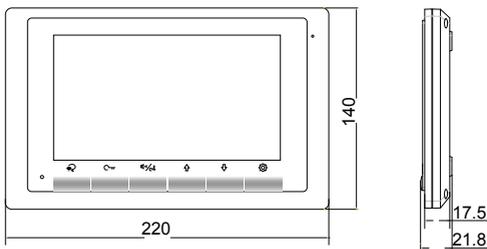


### FEATURES

- ▶ Ultra thin design;
  - ▶ Dummy mechanical button-layer design;
  - ▶ Sensitive touch sensor button;
  - ▶ High qualified ABS plastic with signal white color;
  - ▶ Simplified and intuitive menu style;
-

# 1. Parts and Functions

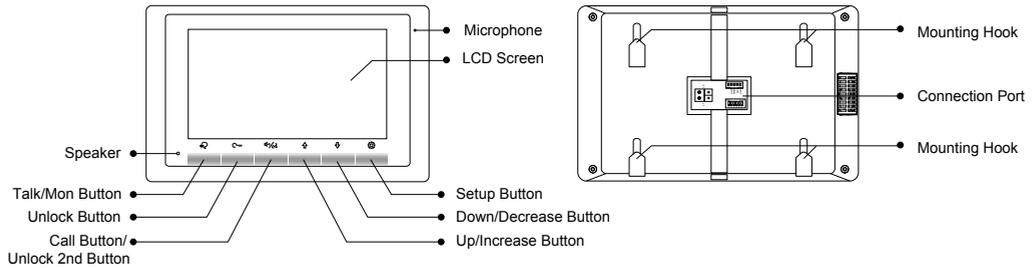


## Terminal description

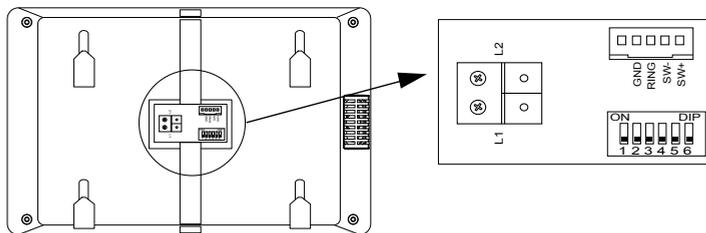

- \* L1,L2: Bus terminal.
- \* SW+,SW-: Door bell call button connection port.
- \* Ring,GND: Extra buzzer connection port.
- \* DIP switches: Total 6 bits can be configured.
- \* Bit1~Bit5: Used to User Code setting.
- \* Bit6: Set to ON if the monitor is at the end of the line or works with DBC4A. Otherwise, set to OFF.

## 2. Door Station Mounting

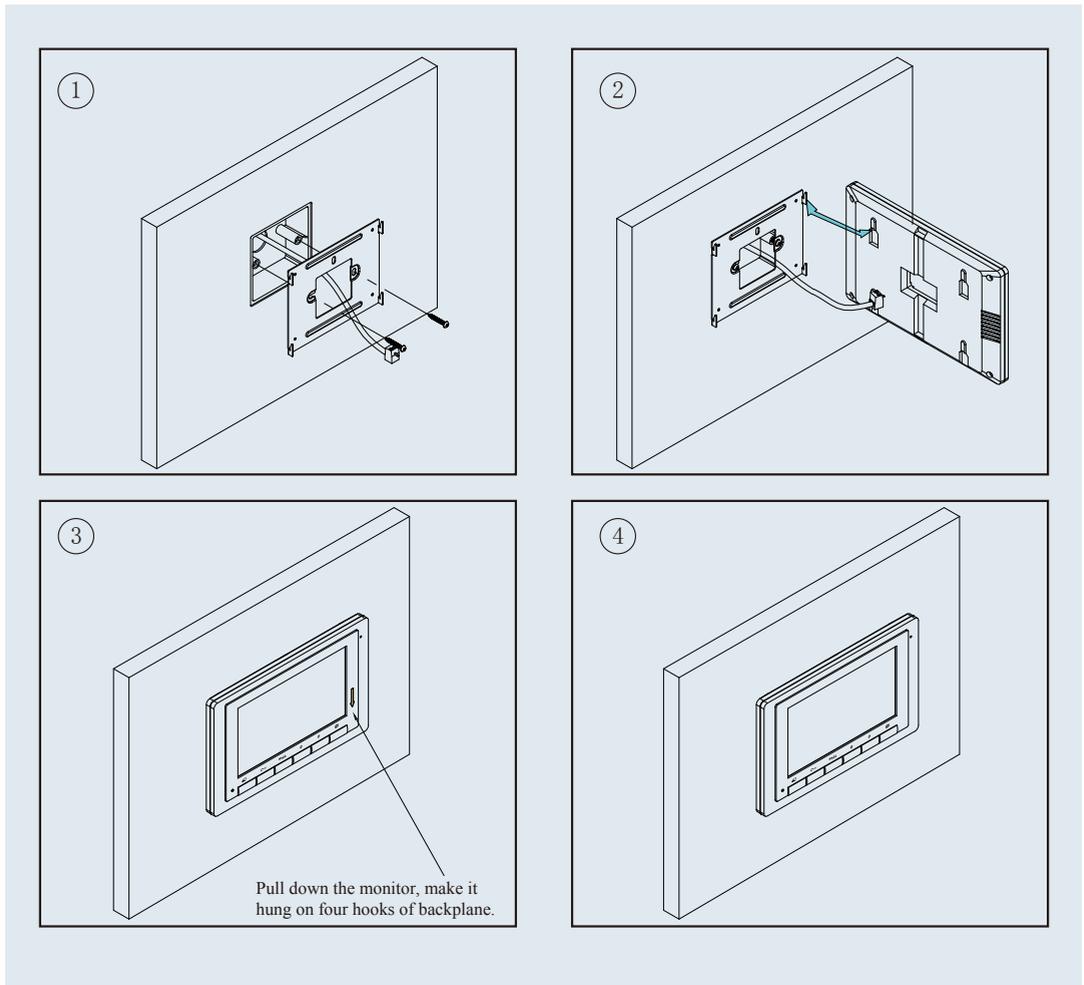

## 3. Specification

- Power supply for indoor monitor: DC 20~28V
- Power consumption: Standby 6.6mA; Working 240mA
- Monitor screen: 7 Inch digital color TFT
- Display Resolutions: 800\*3(R, G, B) x 480 pixels
- Video signal: 1Vp-p, 75Ω, CCIR standard
- Wiring: 2 wires, non-polarity
- Dimension: 140(H)×220(W)×17.5(D)mm


#### 4. Ordering Information for Door Station

Model No.	Brief Description	Menu style
DT17S/TD7	7 inch digital color TFT monitor with dummy mechanical button & white housing	Color icon

#### 5. Packing Information



Dimensions: 166(H)X244(W) X40(D) mm  
Gross Weight: 0.62Kg

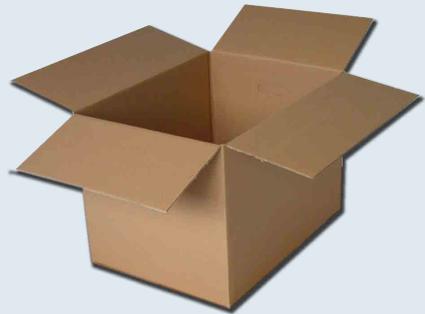

Carton: 530 (H)×340 (W)×258 (D)mm  
Quantity: 24PCS

#### 6. User Interface: Menu style

